




DECKMA GmbH

Decksmaschinen und Automation Vertriebs GmbH

EX Xenon Blitzleuchte / EX Xenon Beacon 5 Joule

BExBG05

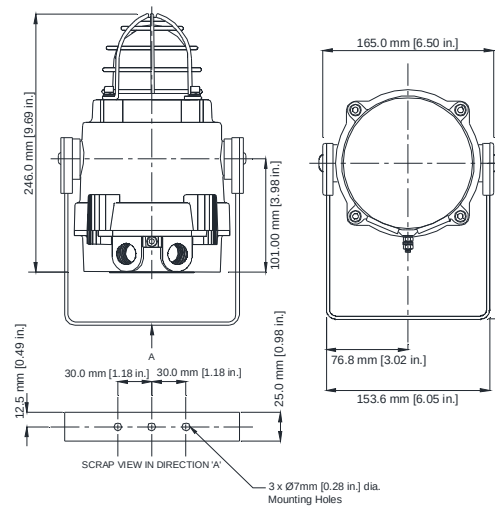

Materialien	Aluminium, pulverbeschichtet, Rot (RAL 3000)	Materials	Aluminium with powder finish, Red (RAL 3000)
Montage	Befestigung mit 3 Schrauben	Mounting	3 screws
Kabeleinführung	1 Kabelverschraubungen M20 1 Blindstutzen M20	Cable entry	1 cable gland M20 1 blind plug M20
Schutzart	IP66 Ex Zone 1, 2, 21, 22 Exd IIC T5 Ta. -50°C to +55°C	Protection class	IP66 Ex Zone 1, 2, 21, 22 Exd IIC T5 Ta. -50°C to +55°C
Leistung, Blitzrate	5 Joule (5 Ws) 1 Hz (50 fpm)	Energy, Flash rate	5 Joule (5 Ws) 1 Hz (50 fpm)
Gewicht	DC: 2,45 KG/ AC: 2,75 KG	Weight	DC: 2,45 KG/ AC: 2,75 KG
Haubenfarben	Orange(A), Rot(R), Blau (B), Klar (C)	Volume	Amber(A), Red(R), Blue (B), Clear (C)
Spannung/Stromaufnahme	24V DC-300mA / 115V AC-140mA / 230V AC-55mA	Voltage/Currant consupcion	24V DC-300mA / 115V AC-140mA / 230V AC-55mA
Type	Merkmale	Features	Best. Nr. / Order No.
BExBG05D 24DC- Color	24V DC	24V DC	On request
BExBG05D 115AC- Color	115V AC	115V AC	On request
BExBG05D 230AC- Color	230V AC	230V AC	On request